

1 MONTH DELIVERY



TOSHULIN EXPERTURN 1600-3 Vertical Turning Center


Features:

- Compact Floor Plan
- Full Contouring C axis with Live Spindle
- Heavy Duty Box Way Design
- 6 Position Cross Rail with M code programming
- Flat Floor Foundation, Clean and Easy Installation
- Full Enclosure with Easy Operator Access Through the Ram Flood Coolant
- 12.59 x 12.59 RAM for Efficient and Rugged Machining
- Blum MicroCompact Tool Measuring System
- Blum TC60 Workpiece Probe

Tooling Adaptors Included:

- Vertical Motorized Milling Adaptor 8,000 rpm HSK63A
- Horizontal Motorized Milling Adaptor 8,000 rpm HSK63A
- Horizontal C-axis Milling Adaptor (Y-axis) HSK 63A
- Vertical Milling Adaptor HSK 63A
- Square Tooling Adaptor
- Horizontal Left Turning Adaptor Sandvik C6
- Vertical Left Turning Adaptor Sandvik C6

Base Machine	EXPERTURN 1600
Table Size	62.9"
Max Part Swing	78.7"
Max Part Height	55.1"
Chuck	4 Jaw Hydraulic Chuck-Self Centering
Axis Travel X Right	53.1"
Axis Travel X Left	41.3"
Axis Travel Z Ram	50.4"
6 Position Rail	After 3.93 and 31.5
Table Speed	400 rpm
Table Power	100 HP
Live Spindle	4,500 rpm
Live Spindle Power	100 HP
Table C Axis	Continuous
Table Capacity	35,200 lbs.
Coolant System	1,000 PSI
ATC – Chain	59 tool holders and 7 adaptors
Control	Siemens 840 Dsl

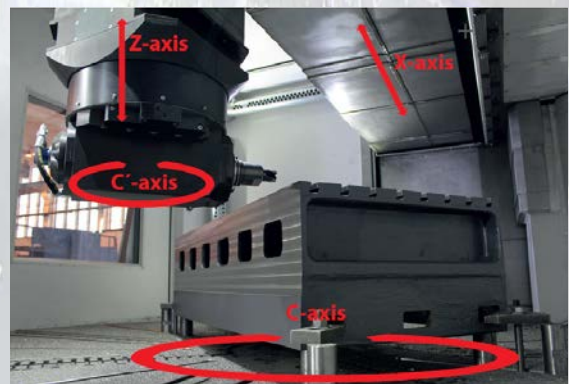

Installation, Training, Parts and Service by Pilsen.